


1.0 Reference and Address			
Report Number	102330297ATL-001A	Original Issued: 11-Jan-2016	Revised: 27-Jul-2020
Standard(s)	Household And Similar Electrical Appliances - Safety Part 1: General Requirements (R2007) [CSA E60335-1/4E:2003 Ed.4] Household And Similar Electrical Appliances - Safety - Part 2-65: Particular Requirements For Air-Cleaning Appliances (R2016) [CSA E60335-2-65:2011 Ed.2]		
Applicant	<u>BioZone Scientific International Inc.</u>	Manufacturer	Jianye Power Electronics (ShenZhen) Co., Ltd.
Address	7616 Southland Blvd., Suite 114, Orlando, FL 32809	Address	77 Xin Qiao Yi Road, Fu Cheng Ao, Ping Hu Town, Long Gang District, ShenZhen 518111
Country	USA	Country	China
Contact	Adam Anthony Saara Ahola	Contact	Ronald Mak Mr. Lok
Phone	(407) 876-2000	Phone	86 755 88835628
FAX	NA	FAX	NA
Email	adam.anthony@biozonescientific.com saara.ahola@biozonescientific.com	Email	ronald@transpowerc.com qc_ljt@transpowerc.com

2.0 Product Description	
Product	Air-cleaner
Brand name	NA
Description	The product covered by this report is a cord connected, indoor air cleaner.
Models	AC05, AC10, AC20, AC30.
Model Similarity	Where AC05 is AirCare 05, AC10 is AirCare 10, AC20 is AirCare 20, AC30 is AirCare 30. All models are identical except for the lamp employed.
Ratings	100-240VAC, 50-60Hz, 0,22-0,11A, Class I
Other Ratings	NA

3.0 Product Photographs

Photo 1 - Overall External view

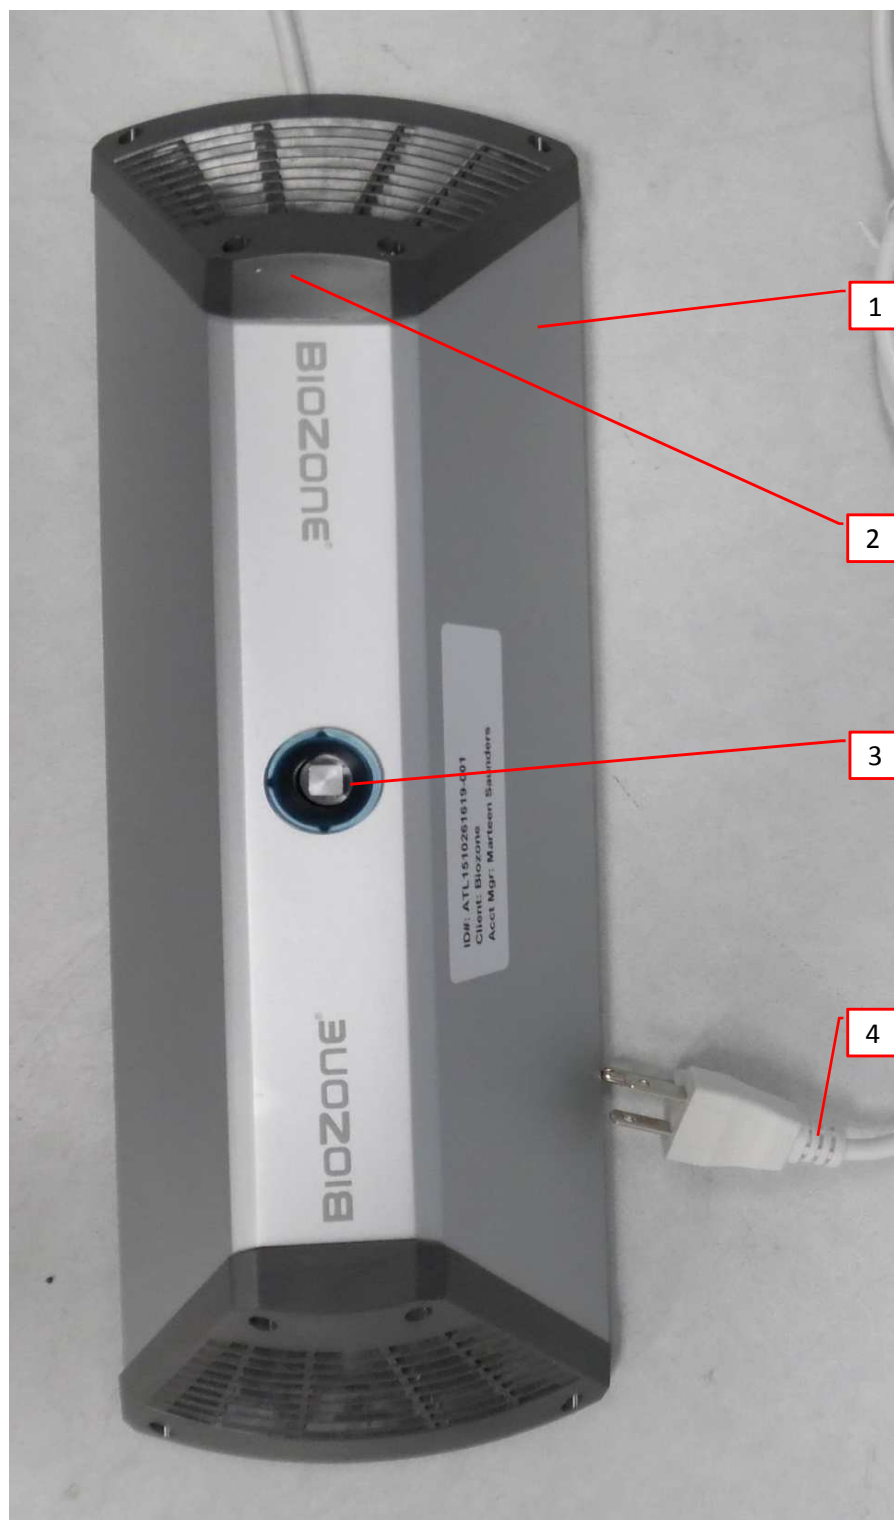


3.0 Product Photographs

Photo 2 - Bottom view




3.0 Product Photographs

Photo 3 - Internal view

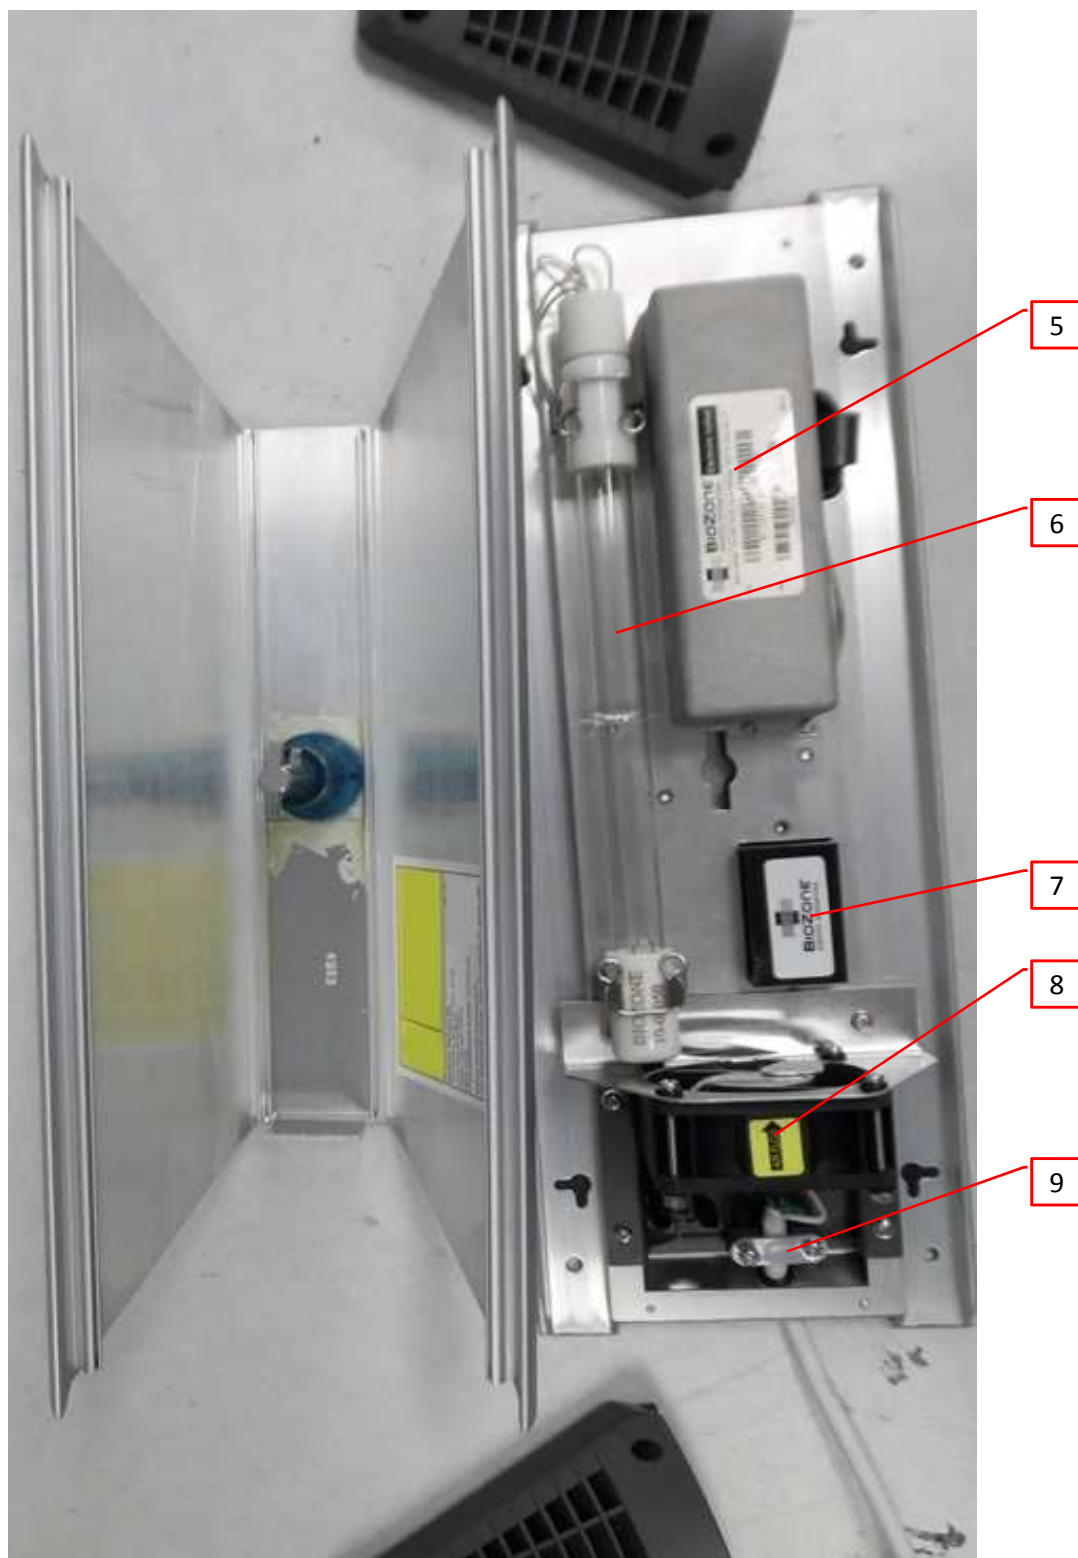

3.0 Product Photographs

Photo 4 - Ballast

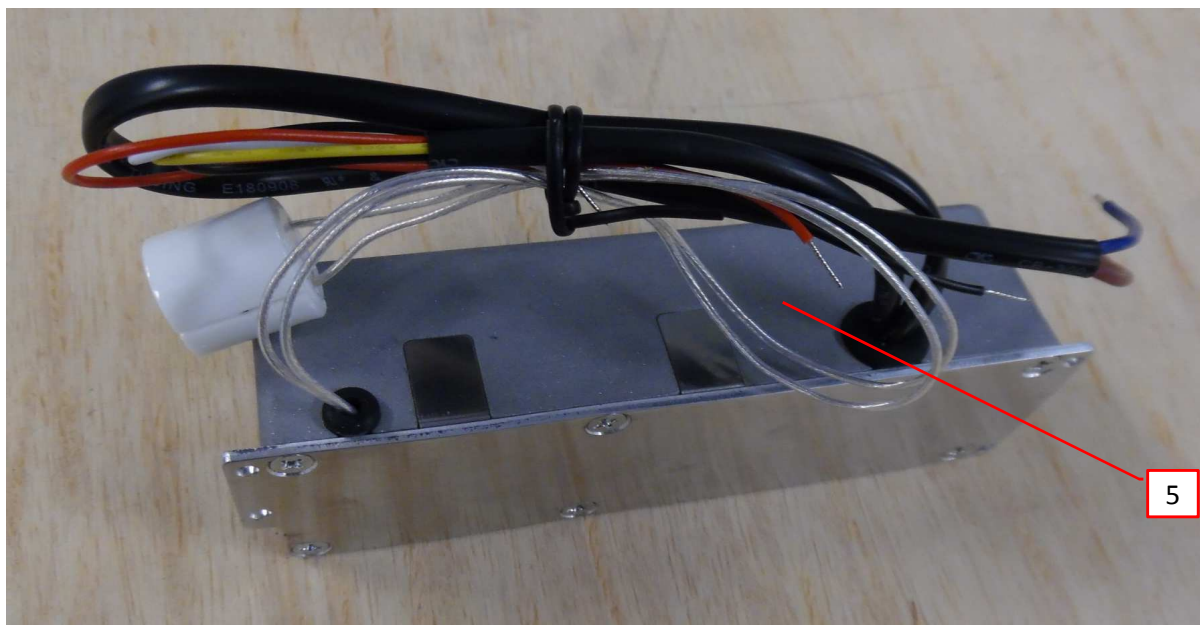

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
1	1	Enclosure	BioZone	R305-06603-0020	Constructed of Aluminum. Dimensioned 15.5" X 5" (bottom edge), 10.25" X 2" (top edge), 3.5" high.	NR
1	2	Polymeric endcaps	Chi Mei Corporation/Kibila c	PW-978B	Qty 2 - flame rated HB min. Secured by screws. 45 louvers offset by similar internal louvers to obstruct direct access to internal components.	UR, CSA
1	3	Enclosure lock	Biozone	AC Interlock	Employed to secure two halves of enclosure. See illustration 2 for details.	NR
1	4	Power Cord	Various	SVT	18AWG, 3 conductor, rated 300V, 105°C. Equipped with NEMA 5-15P style plug	UR, CSA
3, 4	5	Ballast	BioZone	P706.1	Rated input 100-240Vac, 0.22 - 0.11A, Insulation class A, max operating temp 90°C. Fully enclosed in metallic enclosure and potted. Bottom secured by 6 screws.	See 5.0
4	5a	Power Transformer T1 (not shown - potted inside the ballast)	BioZone	EF25	Rated input 240V, Output 22.5V, max current 0.22A inductance, 973µH±10% @ 100KHz 1V (Pin2 to Pin3), dielectric strength (winding to core) 1.2KVAC @ 50/60Hz 2S 2mA and (input to output) 2.5KVAC @ 50/60Hz 2S 2mA	See 5.0
4	5b	Capacitor (X2) (not shown - potted inside the ballast)	Vishay	MKP338 2 X2	Rated 310V, 150nF	UR
3	6	UV lamps	BioZone	10-08010 10-08025 10-08050 10-08100	Rated 34V, 425mA, 12W	NR
3	7	Ionizer	Sunyou Electric Co. Ltd	SY-B-122 (F2JUS)	Rated input 100-240V, 50/60Hz, rated output 230VAC	CSA
3	8	Fan	Sunon Various	MB60251VX-0000-A99 Various	Rated 12Vdc, 2.4W	CSA
3	9	Strain relief	BASF/Ultramid	Polyamide 66/ Nylon 66	Flame rated V-2. See illustration 1 for details.	CSA
3	10	Terminal Block (not shown)	Various	Various	Rated 300V, 6A, flame rated min. V-1.	CSA
3	11	Opto coupler (not shown)	Vishay	SFH618A	Rated 200mW, dielectric strength 5.3KVac	UR

4.0 Critical Components						
Photo #	Item no. ¹	Name	Manufacturer/ trademark ²	Type / model ²	Technical data and securement means	Mark(s) of conformity ³
3	12	Capacitor Y2 (not shown)	Murata	DE2F3KH103M A3B	Rated 10nF, 250Vac, 85°C	CSA
			Vishay	VY2103M63Y5 UG63	Rated 0.0100μF, 440Vac, 125°C	UR
			TDK	CS17-F2GA103MYG S	Rated 0.0100μF, 250Vac, 85°C	CSA
3	13	Capacitor X2 (not shown)	KEMET	PHE840MX63 30MB11R17	Rated 0.33μF, 275Vac, 105°C	CSA
			EPCOS	B32922C3334 M***	Rated 0.33μF, 305Vac, 105°C	UR
NOTES:						
1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.						
2) "Various" means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.						
3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.						


5.0 Critical Unlisted CEC Components

SUBASSEMBLY									
Photo #	Item no.	Name	Manufacturer/Trademark		Type / model				
3, 4	5	Ballast	BioZone		P706.1				
Electrical Rating:		Rated input 100-240Vac, 0.22 - 0.11A			Insulation class A				
Component Standard used:		E60335-1							
COMPONENTS LIST (see below)									
Photo #	Item no.	Photo #	Item no.	Photo #	Item no.	Photo #	Item no.	Photo #	Item no.
4	5a								
VERIFICATION PROCESS									
Frequency: Annual		Test Site: Intertek Duluth			Number of samples to test: 1				
Test Name		Test Parameters							
Dielectric Strength		Apply voltage Between			Test Voltage		Test Time		
		Primary to enclosure			1000 VAC		60		
Verify Construction		One unpotted sample required for visual inspection yearly. Confirm transformer specs per Item 5a as referenced. Dielectric between mains and grounded enclosure of 1000V.							
INSULATED COIL									
Photo #	Item no.	Name	Manufacturer/Trademark		Type / model				
4	5a	Power Transformer T1 (not shown - potted inside the ballast)	BioZone		EF25				
Electrical Rating:		Rated input 240V, Output 22.5V, max current 0.22A			Insulation class A				
Component Standard used:		E60335-1							
MATERIALS LIST (refer to illustrations 3-7 for assembly drawings)									
WINDING(S) RESISTANCE (refer to Illustration 5 for winding details)									
VERIFICATION PROCESS									
Frequency: Annual		Test Site: Intertek Duluth			Number of samples to test: 1				
Test Name		Test Parameters							
Winding resistance		See resistance per winding above.							
Dielectric Strength		Apply voltage Between			Test Voltage		Test Time		
		Primary to core			1000 VAC		60 Sec		
		Primary to secondary			1000 VAC		60 Sec		
		Secondary to core			500 VAC		60 Sec		

6.0 Critical Features	
<u>Recognized Component</u> - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.	
<u>Listed Component</u> - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.	
<u>Unlisted Component</u> - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.	
<u>Critical Features/Components</u> - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.	
<u>Construction Details</u> - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.	
1.	<u>Spacing</u> - In primary circuits, 2.0 mm minimum spacing are maintained through air and 2.8mm over surfaces of insulating material between current-carrying parts of opposite polarity and 4.0 mm minimum between such current-carrying parts and dead-metal parts or low voltage isolated circuits.
2.	<u>Mechanical Assembly</u> - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
3.	<u>Corrosion Protection</u> - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
4.	<u>Accessibility of Live Parts</u> - All uninsulated live parts in primary circuitry are housed within a metal and non-metallic enclosure constructed with no openings other than those specifically described in Sections 4 and 5.
5.	<u>Grounding</u> - All exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord.
6.	<u>Polarized Connection</u> - N/A
7.	<u>Internal Wiring</u> - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At points where internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets. All wiring is minimum 18 AWG, with a minimum rating of 300V, 105°C.
8.	<u>Schematics</u> - NA
9.	<u>Markings</u> - The product is marked with manufacturer's name, brand name, model number, date of manufacturer, and electrical ratings.
10.	<u>Cautionary Markings</u> - Cautionary markings to be French and English. Caution! UV light may damage eyes. Do not look at the lamp when lit. Prudence! La lumière UV peut endommager les yeux. Ne regardez pas la lampe lorsqu'elle est allumée
11.	<u>Installation, Operating and Safety Instructions</u> - Instructions for installation and use of this product are provided by the manufacturer.


7.0 Illustrations

Illustration 1 - Strain relief

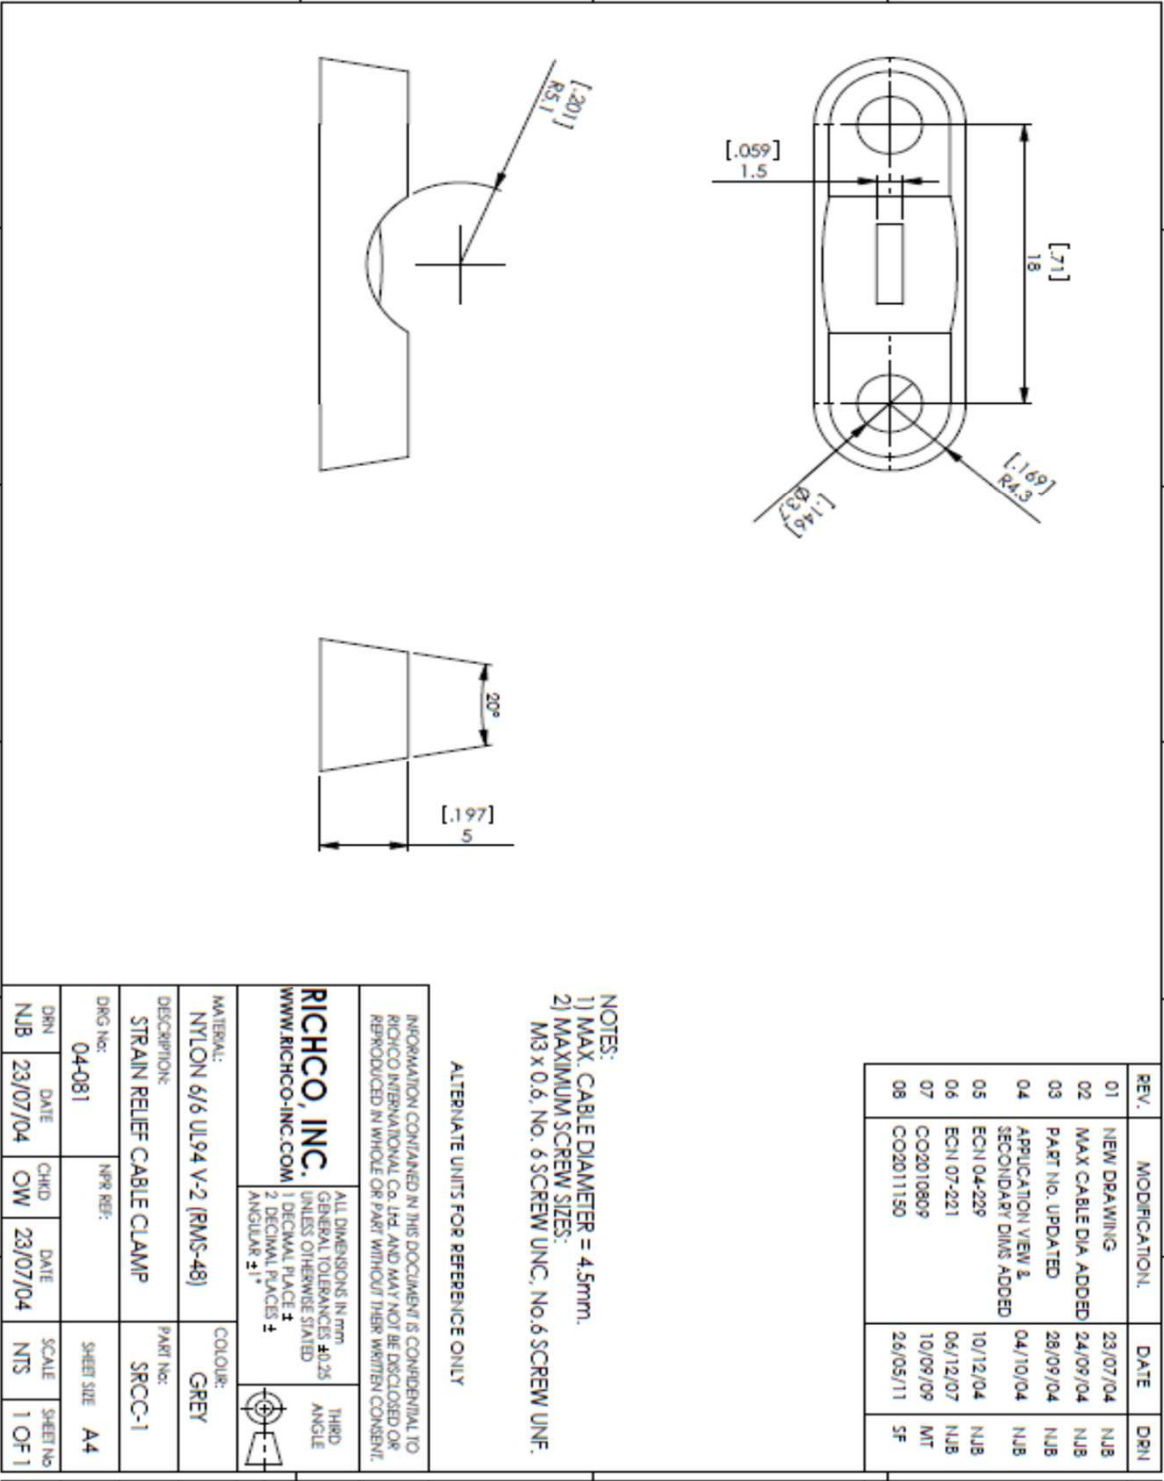

7.0 Illustrations

Illustration 2 - Locking mechanism print

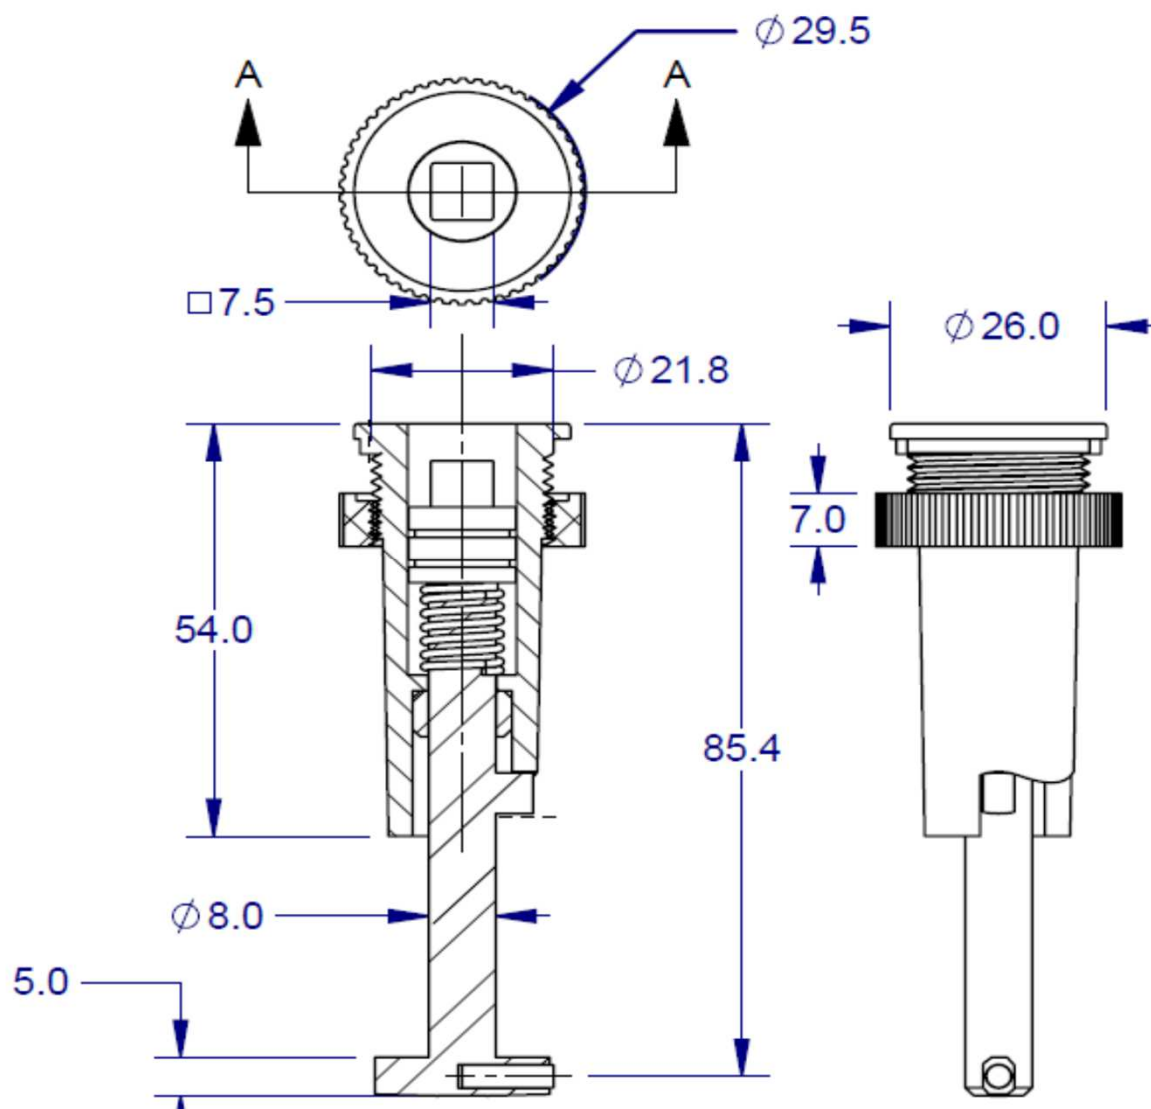

7.0 Illustrations

Illustration 3 - Power Transformer (T1) Constructional Data

Product Specification Sheet

BioZone Scientific BioZone AC/AirCare® P706-T1

Description 973μH EF25 Power Transformer


Part Number: P706-T1

Assembly Number: TFM+MC00668001A


Model Number: WT7-219R Rev.5.0

Project Number: WT-07082-0


External Dimensions:

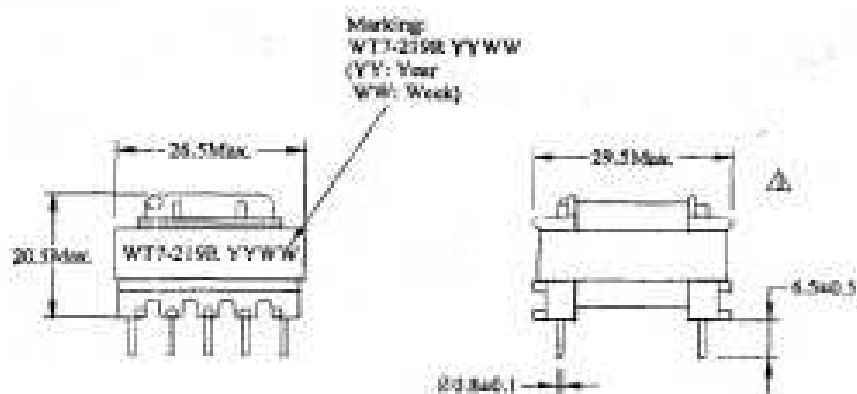

Schematic:

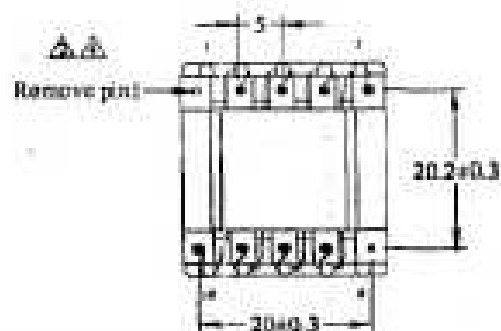

Tolerance ±0.2 Unit: mm

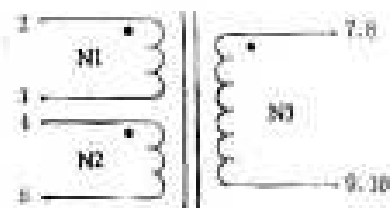


7.0 Illustrations

Illustration 4 - Power Transformer (T1) Constructional Data (continued)

Electrical Characteristics:

ITEM	CONDITION	SPECIFICATION
Inductance	Pin2 to Pin3	973 μ H \pm 10% @ 100KHz 1V
Dielectric strength	Pin2,3,4,5 to Pin7,8,9,10	2.5KVAC @ 50/60Hz 2S 2mA
	Winding to Core	1.2KVAC @ 50/60Hz 2S 2mA

Transformer Winding Sequence:

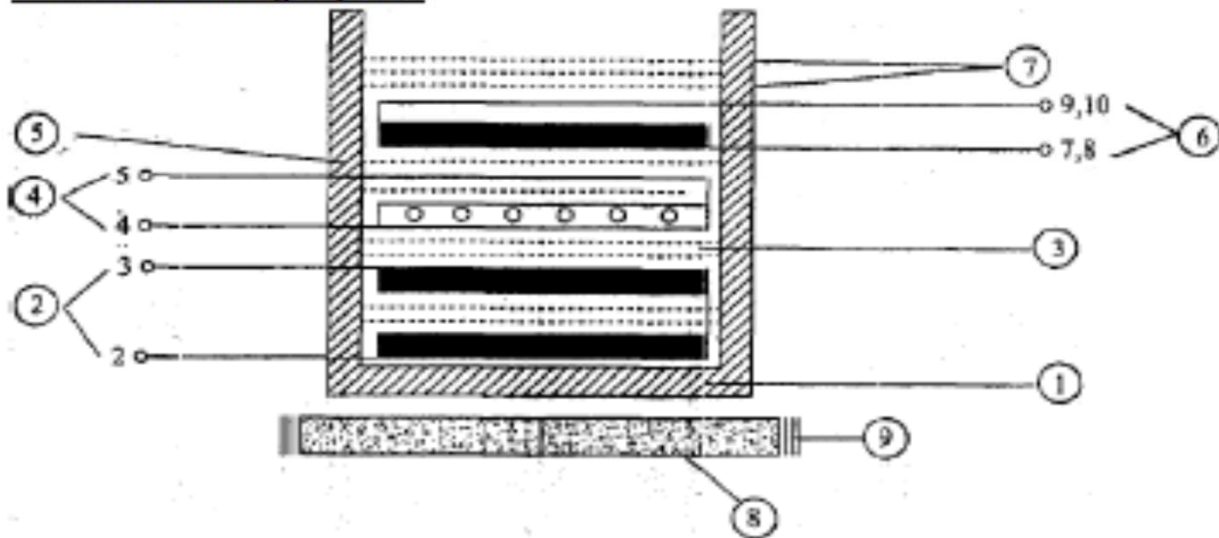

1. Bobbin
2. Pin2-3 Winding
3. Wrapping Tape
4. Pin4-5 Winding
5. Wrapping Tape
6. Pin7,8-9,10 Winding
7. Outer Wrapping Tape
8. Ferrite Core
9. Fix Core Tape

7.0 Illustrations

Illustration 5 - Power Transformer (T1) Constructional Data (continued)


Material List:

DESCRIPTION	RAW MATERIAL	STANDARD	MANUFACTURER
1. Bobbin	Bobbin EE-23(10Pins) P/N:TF-2504-1 Material: Phenolic-T373J, 94V-0 Material: Phenolic-PM9820, 94V-0	ULE59481(S) ULE41429(M)	CHANG CHUN Plastics Co. Sumitomo Bakelite Co.
2. Pin2-3 Winding	Polyurethane Enameled Copper Wire Copper wire IUEW-F ϕ 0.4mm 64 turns After about 32 turns, wrsp 2 layers of tape then go to 64turns	ULE164409	HOI LUEN Co./Equivalent
3. Wrapping Tape	Polyester Adhesive Tape P2280 Thickness 25 μ m Width: 16mm, 2 turns	ULE163111	Jingjiang YaHua Pressure Co./Equivalent
4. Pin4-5 Winding	Polyurethane Enameled Copper Wire Copper wire IUEW-F ϕ 0.4mm 6 turns	ULE164409	HOI LUEN Co./Equivalent
5. Wrapping Tape	Polyester Adhesive Tape P2280 Thickness 25 μ m Width: 16mm, 1 turn	ULE163111	Jingjiang YaHua Pressure Co./Equivalent
6. Pin7,8,9,10 Winding	Triple Insulated Winding Wire TEX-E ϕ 0.6mmX2P 6 turns	ULE206440	FURUKAWA Electric Co./Equivalent
7. Outer wrapping Tape	Polyester Adhesive Tape P2280 Thickness 25 μ m Width: 16mm, 3 turns	ULE163111	Jingjiang YaHua Pressure Co./Equivalent
8. Ferrite Core	Ferrite Core EE25B Material: PG232A 1PC Gap 0.3mm, 1PC No Gap Bottom Side of the Ferrite Core must be insulated by 2 layers of insulation tape		MAGSOURCE Electronics Co.
9. Fix Core Tape	Polyester Adhesive Tape P2280 Thickness 25 μ m Width: 6mm, 3 turns	ULE163111	Jingjiang YaHua Pressure Co./Equivalent
10. Varnish	Varnish WP-2932F-2G	ULE72979	HITACHI Chemical Co.


7.0 Illustrations

Illustration 6 - Power Transformer (T1) Constructional Data (continued)

POWER TRANSFORMER T1 for P706

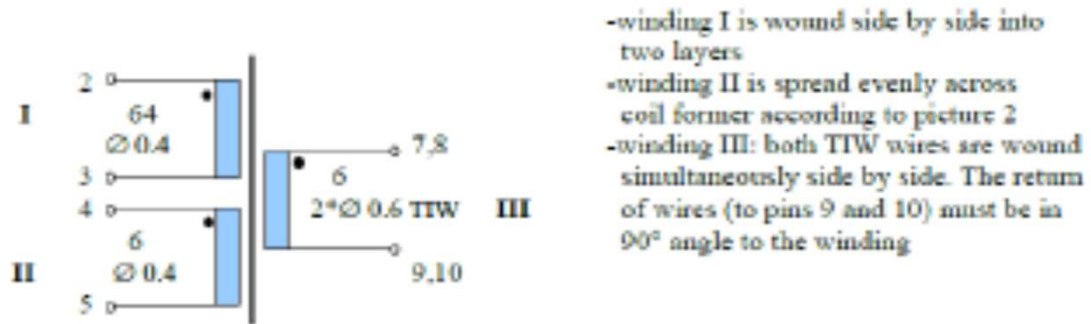

Picture 1

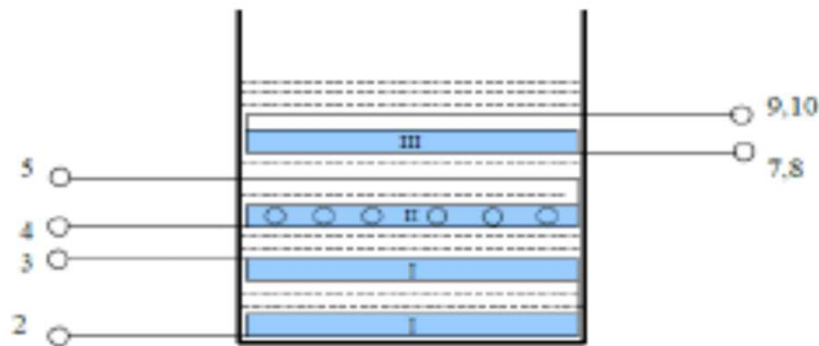


Picture 2

7.0 Illustrations

Illustration 7 - Power Transformer (T1) Constructional Data (continued)

1. Coil former: EF25, horizontal, 10 pins -distance between pins in each row 5 mm;
Flammability V0.
2. Ferrite: EF25, suitable for 150 kHz. Air gap 0.3mm on center tap or 2* 0.15mm between core halves.
3. Enameled Cu-wire dia. 0.4.
4. TIW wire (Triple Insulated Wire) dia. 0.6.
5. Insulation tape (thickness $\approx 25\text{...}50\text{ }\mu\text{m}$), marked in picture 2.

If the creepage distance between primary (=pins 2, 3, 4, 5 and wires connected to these pins) and secondary (=pins 7, 8, 9, 10) thru ferrite is less than 7mm (this depends on coil former type used) bottom side of the ferrites must be insulated by insulation tape (thickness $\approx 25\text{...}50\text{ }\mu\text{m}$) according to picture 3.

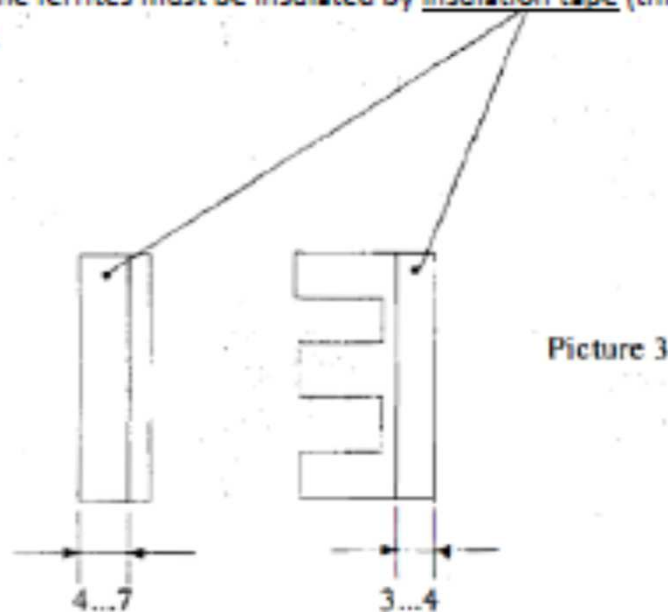

The ferrites are attached to each other with cyanoacrylate adhesive (note: there must be an air gap between ferrites or ferrite center tap). The attachment is secured by winding at least two layers of tape around the ferrites.

The transformer is dip varnished.

8.0 Test Summary					
Evaluation Period	02-Nov-2015 through 06-Jan-2016			Project No.	G102330297
Sample Rec. Date	26-Oct-2015	Condition	Prototype	Sample ID.	ATL1510261619-001
Test Location	1950 Evergreen Blvd., Suite 100, Duluth, GA 30043, USA				
Test Procedure	Testing Lab				
Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria. CSA E60335-1/4E Issued:2003/04/01 Ed:4 (R2007) Household & Similar Electrical Appliances - Safety Part 1: General Requirements was used in conjunction with E60335-2-65.					
The following tests were performed:					
Test Description			CSA E60335-2-65 Issued: 2011/12/01 Clauses		
Heating test			11		
Ballast Fault test - shorted outputs.			19		
Ground Bonding test			27.5		

8.1 Signatures			
A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0.			
Completed by:	Kevin Lemieux	Reviewed by:	Phil Mason
Title:	Project Engineer	Title:	Sr. Staff Engineer
Signature:	Signature on file	Signature:	Signature on file

9.0 Correlation Page For Multiple Listings					
The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program.					
BASIC LISTEE	BioZone Scientific International Inc.				
Address	7616 Southland Blvd., Suite 114, Orlando, FL 32809				
Country	USA				
Product	Air-cleaner				
MULTIPLE LISTEE 1	None				
Address					
Country					
Brand Name					
ASSOCIATED MANUFACTURER					
Address					
Country					
<table border="1"> <thead> <tr> <th>MULTIPLE LISTEE 1 MODELS</th> <th>BASIC LISTEE MODELS</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> </tr> </tbody> </table>		MULTIPLE LISTEE 1 MODELS	BASIC LISTEE MODELS		
MULTIPLE LISTEE 1 MODELS	BASIC LISTEE MODELS				
MULTIPLE LISTEE 2	None				
Address					
Country					
Brand Name					
ASSOCIATED MANUFACTURER					
Address					
Country					
<table border="1"> <thead> <tr> <th>MULTIPLE LISTEE 2 MODELS</th> <th>BASIC LISTEE MODELS</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> </tr> </tbody> </table>		MULTIPLE LISTEE 2 MODELS	BASIC LISTEE MODELS		
MULTIPLE LISTEE 2 MODELS	BASIC LISTEE MODELS				
MULTIPLE LISTEE 3	None				
Address					
Country					
Brand Name					
ASSOCIATED MANUFACTURER					
Address					
Country					
<table border="1"> <thead> <tr> <th>MULTIPLE LISTEE 3 MODELS</th> <th>BASIC LISTEE MODELS</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> </tr> </tbody> </table>		MULTIPLE LISTEE 3 MODELS	BASIC LISTEE MODELS		
MULTIPLE LISTEE 3 MODELS	BASIC LISTEE MODELS				

10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments and/or revisions.

LISTING MARK

The ETL Listing mark applied to the products shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

- 1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
- 2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
- 3) a control number issue by Intertek
- 4) a product descriptor that identifies the standards used for certification. Example:

For US standards, the words, "Conforms to" shall appear with the standard number along with the word, "Standard" or "Std." Example: "Conforms to ANSI/UL Std. XX."

For Canadian standards, the words "Certified to CAN/CSA Standard CXX No. XX." shall be used, or abbreviated, "Cert. to CAN/CSA Std. CXX No. XX."

Can be used together when both standards are used.

Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use.

The facsimile need not have a control number. A control number will be issued **after signed Certification Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory assessment in your facility.

MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

Note to Intertek Follow Up Inspector: The Component Evaluation Center, CEC, will notify you in writing when these components must be selected and sent to the CEC for re-evaluation

Ship the samples to:

Intertek Testing Services NA Inc.

ETL Component Evaluation Center

45000 Helm Street, Suite 150

Plymouth Twp., MI 48170 USA

Attn: Component Evaluation Center

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

11.0 Manufacturing and Production Tests

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

Required Tests

Dielectric Voltage Withstand Test
Grounding Continuity Test

11.1 Dielectric Voltage Withstand Test

Method

One hundred percent of production of the products covered by this Report shall be subjected to a routine production line dielectric withstand test.

The test shall be conducted on products, which are fully assembled. Prior to applying the test potential, all switches, contactors, relays, etc., should be closed so that all primary circuits are energized by the test potential. If all primary circuits cannot be tested at one time, then separate applications of the test potential shall be made.

The test voltage specified below shall be applied between primary circuits and accessible dead-metal parts. The test voltage may be gradually increased to the specified value but must be maintained at the specified value for one second or one minute as required.

Test Equipment

The test equipment shall incorporate a transformer with an essentially sinusoidal output, a means to indicate the applied test potential, and an audible and/or visual indicator of dielectric breakdown.

The test equipment shall incorporate a voltmeter in the output circuit to indicate directly the applied test potential if the rated output of the test equipment is less than 500VA.

If the rated output of the test equipment is 500VA or more, the applied test potential may be indicated by either:

- 1 - a voltmeter in the primary circuit;
- 2 - a selector switch marked to indicate the test potential; or
- 3 - a marking in a readily visible location to indicate the test potential for test equipment having a single test potential output.

In cases 2 and 3, the test equipment shall include a lamp or other visual means to indicate that the test potential is present at the test equipment output. All test equipment shall be maintained in current calibration.

Products Requiring Dielectric Voltage Withstand Test:

<u>Product</u>	<u>Test Voltage</u>	<u>Test Time</u>
All products covered by this Report.	1000V	60 s
	or	
	1200V	1 s

11.2 Grounding Continuity Test



Method

Each product listed below shall be subjected to a test to determine that there is continuity between accessible

If all accessible dead metal is connected, only a single test need be performed. A visual or audible device (ohmmeter, buzzer, etc.) may be used to indicate grounding continuity.

Products Requiring Grounding Continuity Test:

All products covered by this Report.

12.0 Revision Summary				
The following changes are in compliance with the declaration of Section 8.1:				
Date/ Proj # Site ID	Project Handler/ Reviewer	Section	Item	Description of Change
27-Apr-2020	Matthew Parsons	1	-	Revised standards to match EDGE (editions and revision dates remain the same) from "CSA E60335-1/4E Issued:2003/04/01 Ed:4 (R2007) Household & Similar Electrical Appliances - Safety Part 1: General Requirements; CSA E60335-2-65 Issued: 2011/12/01 Household and Similar Electrical Appliances - Safety - Part 2-65: Particular Requirements for Air-Cleaning Appliances" to "Household And Similar Electrical Appliances - Safety Part 1: General Requirements (R2007) [CSA E60335-1/4E:2003 Ed.4]; Household And Similar Electrical Appliances - Safety - Part 2-65: Particular Requirements For Air-Cleaning Appliances (R2016) [CSA E60335-2-65:2011 Ed.2]"
		2	-	Updated Applicant as follows: Address from "7616 Southland Blvd Unit 114, Orlando FL 32809" to "7616 Southland Blvd., Suite 114, Orlando, FL 32809"; Contacts from "Adam Anthony, Jodi DeQuiros" to "Adam Anthony, Saara Ahola"; Fax from "(407) 876-7630" to "NA"; Email from "adam.anthony@biozonescientific.com" to "adam.anthony@biozonescientific.com, saara.ahola@biozonescientific.com"
G104318404CRT	Tyler Sherwood	2	-	Revised Manufacturer as follows: Corrected Manufacturer name from "Jianye Power Electronics (ShenZhen) Company Ltd" to "Jianye Power Electronics (ShenZhen) Co., Ltd."; Corrected address from "1-2/F, Block D, 77 Xin Qiao Yi Road, Fu Cheng Ao, Ping Hu Town, Long Gang District, ShenZhen" to "77 Xin Qiao Yi Road, Fu Cheng Ao, Ping Hu Town, Long Gang District, ShenZhen 518111"; Contacts from "Harry Chan, Nick Chang" to "Ronald Mak, Mr. Lok"; Phone from "0755-88835628" to "86 755 88835628"; Email from "harry@transpowerc.com" to "ronald@transpowerc.com, qc_ljt@transpowerc.com"
27-Jul-2020	 A. Sharma	2	-	Updated models from AirCare 05, AirCare 10, AirCare 20, AirCare 30 to AC05, AC10, AC20, AC30.
G104395648SVN	 D. Tesfaye			Updated model similarity from All models are identical except for the lamp employed to Where AC05 is AirCare 05, AC10 is AirCare 10, AC20 is AirCare 20, AC30 is AirCare 30. All models are identical except for the lamp employed.
		-	-	This revision resolves Variations affecting listing report items found on 7/2/2020 of Order # 5003138.